


PRODUCT DATASHEET

RN2511-16A-SNB

16-Element Multi-Constellation GNSS Anti-Jamming Terminal

A documented gnss anti-jamming terminal for receiver and platform integration. Product selection and final configuration remain subject to engineering review.

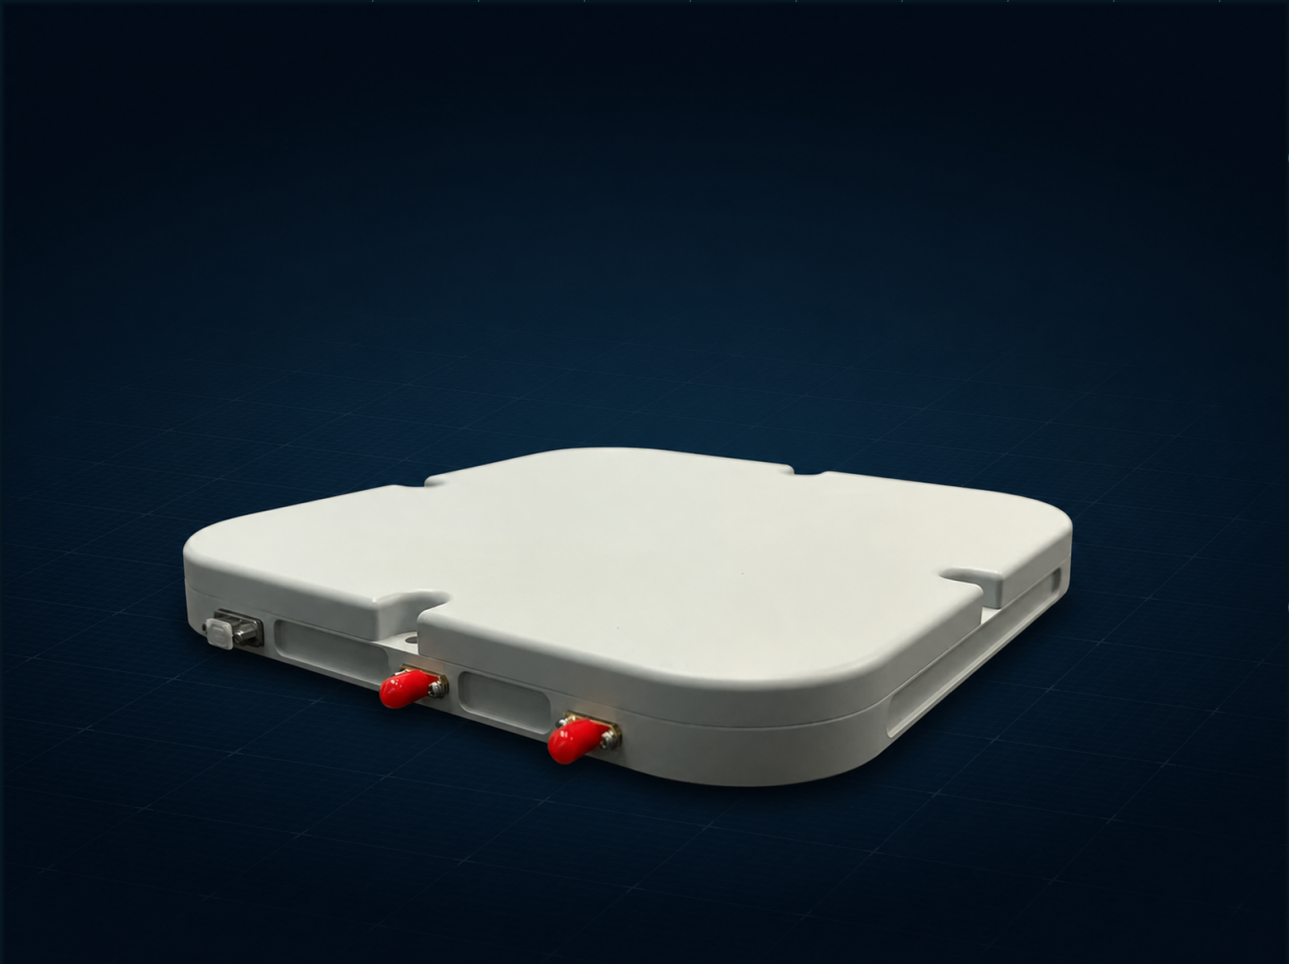

Shenzhen ResiNav Co., Ltd. develops and manufactures GNSS anti-jamming antennas, terminals and navigation system solutions for commercial and industrial platform integration.

A focused product reference for GNSS integration

RN2511-16A-SNB is a gnss anti-jamming terminal designed for receiver and platform integration. It provides published configuration information for engineering teams comparing signal requirements, installation constraints and navigation interfaces.

DOCUMENTED CONFIGURATION	ENGINEERING REVIEW
Constellations GPS; Galileo; BeiDou Frequency bands GPS L1; Galileo E1; BDS B1 Element count 16 Channel count 16	Confirm receiver architecture, required bands, mounting position, available space, cable routing, power path and platform interface before selecting a candidate configuration.

Integration context

Engineering teams should treat the antenna, receiver, platform, power and data interfaces as one system boundary. The final configuration should be confirmed against the target receiver and installation environment rather than inferred from a generic product category.

Typical review inputs: receiver model; required constellations and bands; interface and cable constraints; mounting arrangement; available installation space; power requirements; platform operating context; quantity and schedule.

Published technical parameters

Supported constellations	GPS; Galileo; BeiDou
Frequency bands	GPS L1; Galileo E1; BDS B1
Element count	16
Channel count	16
Anti-jamming capability	Greater than or equal to 100 dBc with 1 interferer; greater than or equal to 85 dBc with 7 interferers; greater than or equal to 70 dBc with 15 interferers
Interference types	Narrowband high-power interference; wideband spectrum-matched interference; pulse interference; swept-frequency interference; mixed interference
Coverage and orientation	Azimuth: 0 to 360 degrees; elevation: -90 to 90 degrees

Mechanical and electrical

Power consumption	Less than or equal to 25 W
Dimensions	230 x 230 x 24 mm
Weight	Less than or equal to 1250 g


RF output

RF output frequency	1561.098 MHz; 1575.42 MHz
RF output power	-70 to -60 dBm
RF output impedance	50 ohm

Information for a productive configuration review

RECEIVER AND SIGNAL	INSTALLATION AND PLATFORM
Provide receiver model, required constellations, frequency bands, channel requirements and intended navigation outputs.	Provide platform role, mounting location, available clearance, cable route, connector and power constraints, operating environment, quantity and schedule.

Product illustration

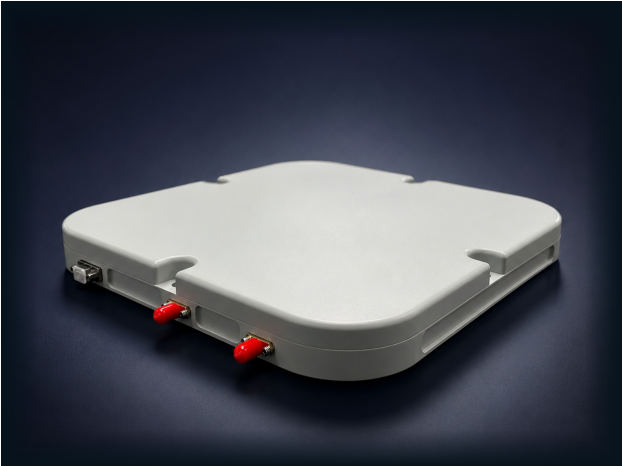

Company contact

Shenzhen ResiNav Co., Ltd.
Email: Neil@resinav.com
WhatsApp: +86 135 1001 3379
Website: <https://resinav.com/>

Important: This datasheet is an engineering reference based on the published product record. It is not a certification, test report, customer deployment statement or guarantee of final platform suitability. Product configuration remains subject to engineering review.